



IP-50

RS-232 Control Over LAN



- > Environmental monitoring
- > Control and monitoring of DV products
- > Digital Signage installations
- > Industrial systems monitoring and control

The IP-50 provides easy and direct connection to products using networks and the Internet. The IP-50 come with a standard Ethernet connection, RS-232 interface and on-board fully programmable and customizable web server. It can be used to control and monitor any RS-232 device remotely. Users can design and setup their own user interface and functionality or access the expanding portfolio of standard product packages from www.digitalview.com/ip-50.

RS-232 Interface

DB9-Female connector x 1
 Serial baud rate: 2400
 Data bits: 8
 Parity : none
 Stop bits: 1
 RS-232: TxD, RxD

Environmental

Operating temperature : 0 C to 50 C
 Relative humidity : 5%-95% relative humidity (Non-condensing)

Weight

Weight (net) : 130g

Network Interface


Ethernet 10BaseT
 RJ-45 connector x 1
 Supported protocols: IP, TCP, DHCP

Power

Power input : 7.5V DC
 Power consumption : 200mA @7.5V

Ordering Options

P/N 586013600-3 IP-50

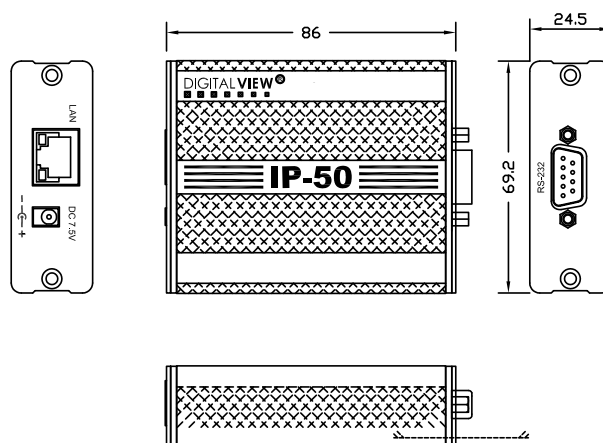

EUROPE

6 Marylebone Passage, London, W1W 8EX, UK
 t : +44 (0) 20-7631-2150

ASIA

16th Floor Millennium City 3, 370 Kwun Tong Road, Kwun Tong, Hong Kong
 t : (852) 2861-3615

USA

18440 Technology Drive, Morgan Hill, CA 95037, USA
 t : +1 (408) 782-7773