
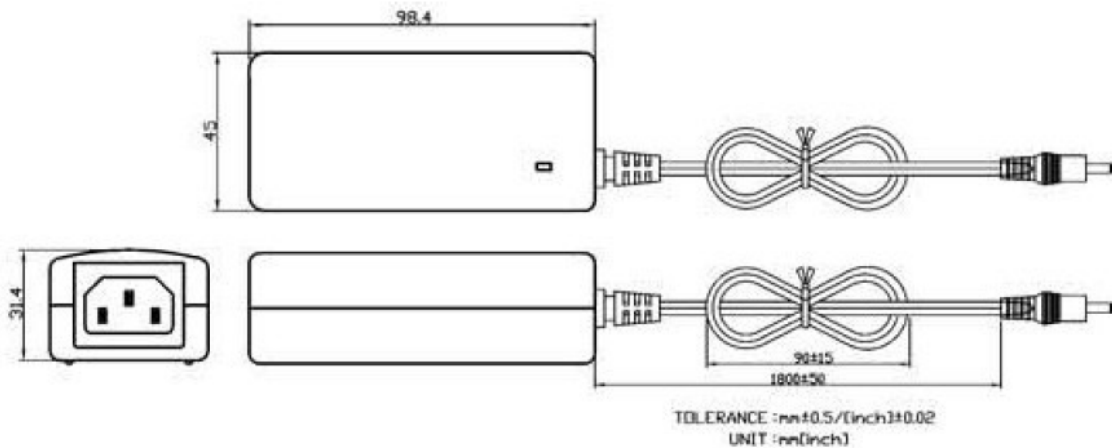






Power supply	P/N 500001701-3
Features: Universal Input from 100Vac~240Vac 50/60Hz Desk & 24W Single Output With LED Indicator Light Input/Output Specification: Input Voltage: AC 100V~240V 50/60Hz Output Power: 24W Output Voltage: 12V Output Current : 2.0A	
AC input voltage range	100~240VAC, 50/60Hz
Overload protection	120%~250% of rated load
Over Current Protection	120%~250% of rated load
Over voltage protection	Auto recovery
Short Protection	Auto recovery
Withstand voltage	1500Vac (Class I) / 3000Vac (ClassII)
Operating temperature	0~40°C
Storage Temperature	-40~85°C
Operating Relative Humidity	5~95% RH
No Load Standby Power	0.5W max. @ 120Vac
Safety standards	UL,cUL,TUV,PSE,BSMI,C-Tick,3C,BSMI
EMC standards	FCC,CE
Dimension (L*W*H)(mm)	98.4 x 45 x 31.4 mm
Insulation Resistance	100MΩ min. @ DC500V

Power supply drawing :




Power cord selection:


Power cord	P/N 420000100-3	P/N 420000110-3	P/N 420000130-3	P/N 420000140-3
Cable length	2 meter	2 meter	2 meter	2 meter
Plug standard	Type B – NEMA 5-15	Type G - BS 1363, IS 401 & 411, MS 589, SS 145	Type E+F - CEE 7/7	Type I – AS/NZS 3112
Power plug type				
Suit for market	US	UK / HK	France / Germany	Australia

Power cord drawing :


P/N 420000100-3 :

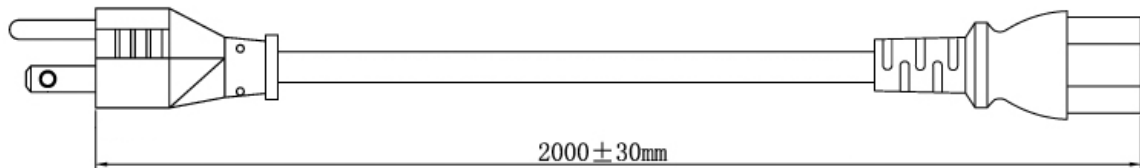

P/N 420000110-3 :

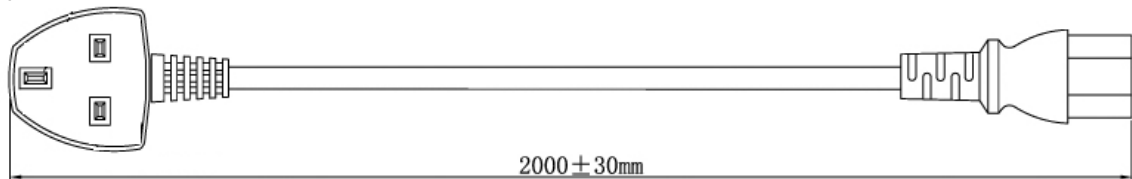

P/N 420000130-3 :

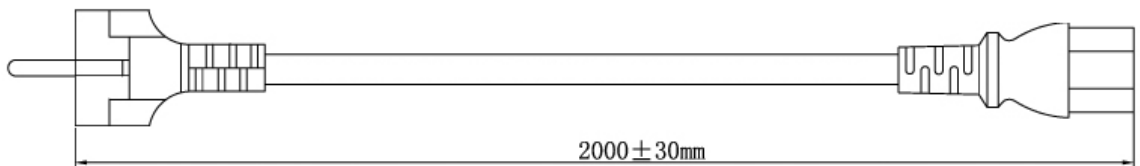

P/N 420000140-3 :

