






Power supply	P/N 500004000-3
<p>Features: Universal Input from 100Vac~240Vac 50/60Hz Desk & 49.92W Single Output With LED Indicator Light</p> <p>Input/Output Specification: Input Voltage: AC 100V~240V 50/60Hz Output Power: 49.92W Output Voltage: 12V Output Current : 4.16A Efficiency: >80%</p>	
AC input voltage range	90~264VAC, 47~63Hz Max 1.6A
Overload protection	Input: 2A @250Vac
Over Current Protection	Auto recovery
Over voltage protection	Auto recovery
Short Protection	Auto recovery
Withstand voltage	1500Vac 10mA for 3 sec.
Operating temperature	0~40°C
Operating relative humidity	20%-85% RH
Storage Temperature	-40~70°C
Storage relative humidity	10%-95% RH
No Load Standby Power	0.5W max. @ 120Vac
Safety standards	UL,cUL,TUV,CCC,CB,C-TICK
EMC standards	FCC,CE
Dimension (L*W*H)(mm)	110 x 62.2 x 32 mm (±0.2mm)
Life	On-Off life: 10000 times on-off @90Vac Operational life: 50000 hrs@25°C

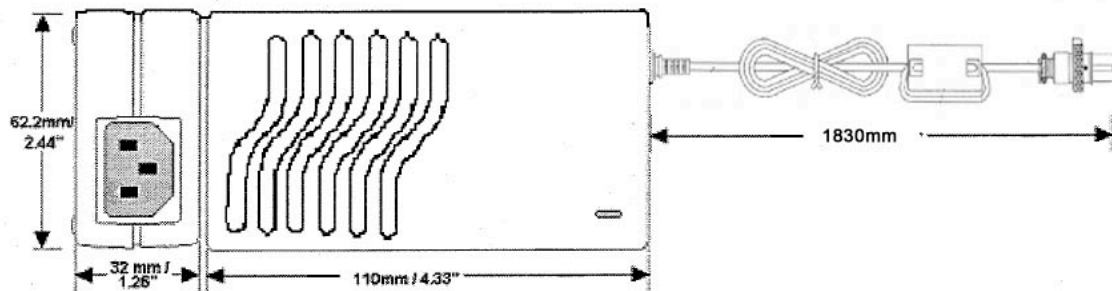


Power cord selection:


Power cord	P/N 420000100-3	P/N 420000110-3	P/N 420000130-3	P/N 420000140-3
Cable length	2 meter	2 meter	2 meter	2 meter
Plug standard	Type B – NEMA 5-15	Type G - BS 1363, IS 401 & 411, MS 589, SS 145	Type E+F - CEE 7/7	Type I – AS/NZS 3112
Power plug type				
Suit for market	US	UK / HK	France / Germany	Australia

Power cord drawing :


P/N 420000100-3 :

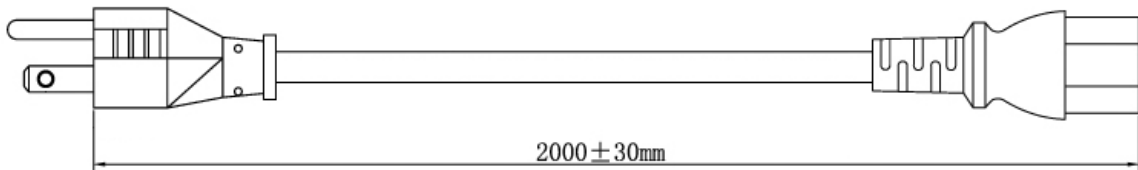

P/N 420000110-3 :

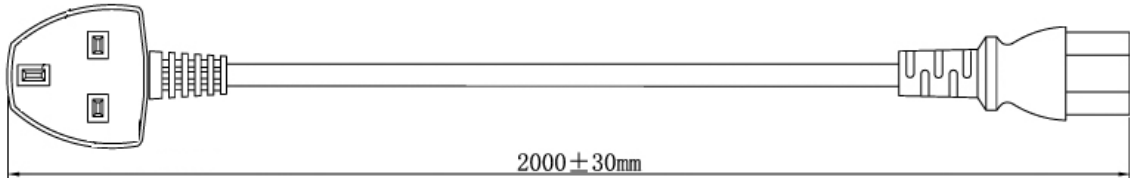

P/N 420000130-3 :

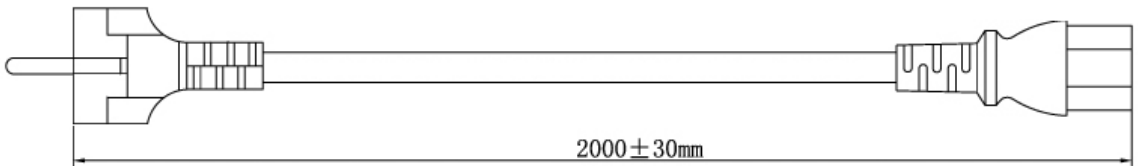

P/N 420000140-3 :

